

OS-I8-FEN12P-ALMS | 12MP Ultra HD Vandal-Proof IR Network Fisheye Camera



- 1/2.3" 12M progressive scan CMOS
- H.264 & MJPEG dual-stream encoding
- Max 15fps@12M(4000x3000), 25/30fps@3M(2048x1536)
- Multiple Correct Mode: Original, Panoramic, Double Panoramic, 1+3, Eptz, 4 pictures
- DWDR, Day/Night(ICR), 3DNR, ROI, AWB, AGC, BLC
- Multiple network monitoring: Web viewer, CMS(DSS/PSS) & DMSS
- Max. IR LEDs Length 10m
- 1/1 Audio in/out(Built in Mic)
- Micro SD memory, IP67, IK10, PoE


Technical Specifications

Camera	
Image Sensor	1/2.3" 12M progressive scan CMOS
Effective Pixels	4000 (H) * 3000 (V)
Scanning System	Progressive
Electronic Shutter Speed	Auto/Manual 1/3~1/10000
Minimum Illumination	0.01Lux/F2.2(Color), 0Lux/F2.2(IR on)
S/N Ratio	More than 65dB
Video Output	N/A
Camera Features	
Max. IR LEDs Length	10m
Day/Night	Auto(ICR) / Color / B/W
Backlight Compensation	BLC/ HLC/DWDR
White Balance	Auto/Manual
Gain Control	Auto/Manual
Noise Reduction	3D
Privacy Masking	Up to 4 areas
Lens	
Focal Length	1.57mm
Max Aperture	F2.2
Focus Control	Manual
Angle of View	185°/185°/185°
Lens Type	Manual
Mount Type	Board-in Type
Video	
Compression	H.264H/MJPEG/JPEG
Resolution	12M(4000× 3000)/8M(2880× 2880)/6M(2880× 2160)/3M(2048× 1536)
Frame Rate	Main Stream: 12M(1~15fps)/3M (1 ~ 25/30fps) Sub Stream: D1/CIF(1 ~ 25/30fps)

Bit Rate	40Kbps~8192Kbps
Correct Mode	Original, Panoramic, Double Panoramic, 1+3, Eptz, 4 pictures
Audio	
Compression	G.711a/G.711u/PCM
Interface	1/1 channel In/Out(Built in Mic)
Network	
Ethernet	RJ-45 (10/100Base-T)
Wi-Fi	N/A
Protocol	HTTP, TCP, ARP, RTSP, RTP, UDP, RTCP, SMTP, FTP, DHCP, DNS, DDNS, PPPOE, IPv4/v6, SNMP, QoS, UPnP, NTP
Compatibility	ONVIF, PSIA, CGI
Max. User Access	20 users
Smart Phone	iPhone, iPad, Android, Windows Phone
Auxiliary Interface	
Memory Slot	Micro SD
RS485	N/A
Alarm	2/1 channel In/Out
PIR Sensor Range	N/A
General	
Power Supply	DC12V, PoE (802.3af)
Power Consumption	<13W
Working Environment	30°C~+60°C, Less than 95%RH
Ingress Protection	IP67
Vandal Resistance	IK10
Dimensions	150mm x 50.7mm
Weight	0.58kg (0.86kg with packaging)

OS-I8-FEN12P-ALMS | 12MP Ultra HD Vandal-Proof IR Network Fisheye Camera

Dimensions

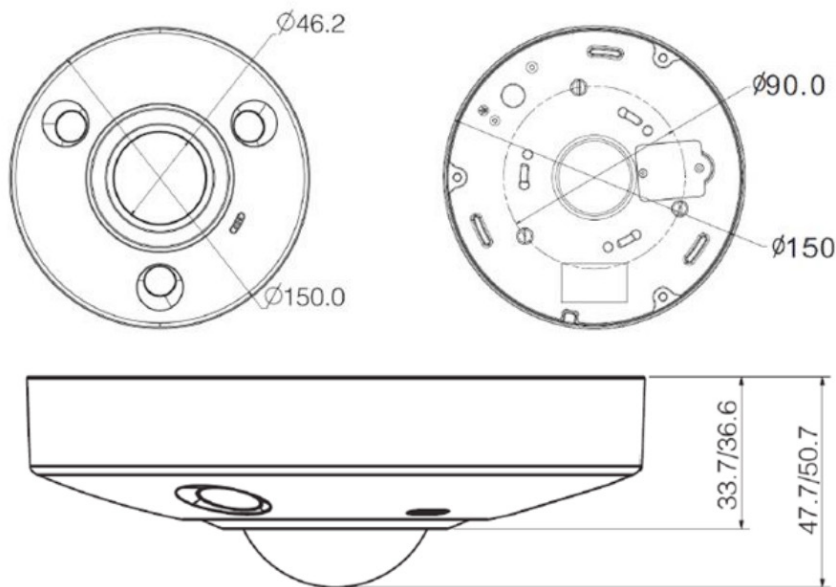

Accessories (optional)

				
OS-PFA100	OS-PFB302S	OS-PFA132	OS-PFA152	OS-PFA151

* The information contained in this document (photos, drawings, dimensions, specifications) may be subject to change without prior notice.
** Copyright© Osiris Security. All rights reserved. The information in this document can not be published, rewritten or republished in any form. If you wish to use the text or images in this document for commercial reasons, please contact marketing@osiris-security.com