

OS-I4-BEN8F-AELST-0280 | 8MP WDR IR Mini Bullet Network Camera



- 1/2.5" 8Megapixel progressive scan STARVISTM CMOS
- H.265 & H.264 triple-stream encoding
- 15fps@4K(3840×2160), 25/30fps@3M(2304×1296)
- Smart Detection supported
- WDR(120dB), Day/Night(ICR), 3DNR, AWB, AGC, BLC
- Multiple network monitoring: Web viewer, CMS(DSS/PSS) & DMSS
- 2.8mm fixed lens
- Max. IR LEDs Length 60m
- Micro SD memory, IP67, PoE



System Overview

Bringing high efficient video compression. It saves bandwidth and storage, energy-saving design to enhance the monitoring system. Meanwhile, the series offers features such as starlight, Smart IR technology, intelligent image analysis techniques. It provides excellent image quality and intelligent and efficient event reminders. This series provides IP67 weatherproof and IK10 vandal-proof protection feature. Give customers more value.

Functions

ePoE technology

The ePoE technology adopts advanced 2D-PAM3 coding modulation from physical layer, and realizes full duplex transmission over 800 meters at the speed of 10Mbps, or 300 meters at the speed of 100Mbps via Cat 5 or coaxial cable media. Besides, it supports PoE and PoC power supply technology which has greatly simplified construction and wiring. Osiris ePoE technology offer a new way to accomplish long distance transmission between IP camera and network switch. It allows more flexible surveillance system design, improves reliability and saves construction and wiring cost.

Smart H.265+

Smart H.265+ is the optimized implementation of the H.265 codec that uses a scene-adaptive encoding strategy, dynamic GOP, dynamic ROI, flexible multi-frame reference structure and intelligent noise reduction to deliver high-quality video without straining the network. Smart H.265+ technology reduces bit rate and storage requirements by up to 70% when compared to standard H.265 video compression.

Wide Dynamic Range

Embedded with industry leading wide dynamic range (WDR) technology, vivid pictures are achieved even in the most intense contrast lighting conditions. For applications with both bright and low lighting conditions that change quickly, True WDR (120dB) optimizes both the bright and dark areas of a scene at the same time to provide usable video.

Intelligent Video System (IVS)

With built-in intelligent video analytics, the camera has the ability to detect and analyze moving objects for improved video surveillance. The camera provides optional standard intelligence at the edge allowing detection of multiple object behaviors such as abandoned or missing objects. IVS also supports Tripwire analytics, allowing the camera to detect when a pre-determined line has been crossed, ideal for business intelligence, and Facial Detection, for searching or identification of individuals.

Protection

Supporting $\pm 30\%$ input voltage tolerance, this camera suits even the most unstable conditions for outdoor applications. Its 4KV lightning rating provides protection against the camera and its structure from the effects of lightning.

Environmental

Osiris cameras operate in extreme temperature environments, rated for use in temperatures from -30°C to $+60^{\circ}\text{C}$ (-22°F to $+140^{\circ}\text{F}$) with 95% humidity.

Interoperability

The camera conforms to the ONVIF (Open Network Video Interface Forum) specifications, ensuring interoperability between network video products regardless of manufacturer.

OS-I4-BEN8F-AELST-0280 | 8MP WDR IR Mini Bullet Network Camera

Technical Specifications

Camera					
Image Sensor		1/2.5" 8Megapixel progressive scan CMOS			
Effective Pixels		3840(H)x2160(V)			
RAM/ROM		512MB/32MB			
Scanning System		Progressive			
Electronic Shutter Speed		Auto/Manual, 1/3~1/100000s			
Minimum Illumination		0.06Lux/F1.6(Color, 1/3s,30IRE) 0.4Lux/F1.6(Color, 1/30s,30IRE) 0Lux/F1.6(IR on)			
S/N Ratio		More than 50dB			
IR Distance		Distance up to 60m (197ft)			
IR On/Off Control		Auto / Manual			
IR LEDs		4			
Lens					
Lens Type		Fixed			
Mount Type		Board-in			
Focal Length		2.8mm			
Max. Aperture		F1.6			
Angle of View		H:112° (88°), V:69° (48°)			
Focus Control		Fixed			
Close Focus Distance		0.9m			
DORI Distance	Lens	Detect	Observe	Recognize	Identify
	W	80m	32m	16m	8m
	T	120m	48m	24m	12m
Pan/Tilt/Rotation					
Pan/Tilt/Rotation		Pan:0°~360°, Tilt:0°~90°, Rotation:0°~360°			
Intelligence					
IVS		Tripwire, Intrusion, Object Abandoned/ Missing			
Advanced Intelligent Functions		Face Detection			
Video					
Compression		H.265+/H.265/H.264+/H.264			
Streaming Capability		3 Streams			
Resolution		4K(3840×2160)/6M(3072×2048)/ 5M(2560×1920)/ 3M(2048×1536)/3M(2304×1296)/ 1080P(1920×1080)/1.3M(1280×960)/ 720P(1280×720)/ D1(704×576/704×480) / VGA(640×480)/ CIF(352×288/352×240)			

Frame Rate	Main Stream: 4K(1~15fps)/ 3M(1~25/30fps) Sub Stream: D1(1~25/30fps) Third Stream: 1080P(1~25/30fps)
Bit Rate Control	CBR/VBR
Bit Rate	H.264: 24K ~ 10240Kbps H.265: 14K ~ 9984Kbps
Day/Night	Auto(ICR) / Color / B/W
BLC Mode	BLC / HLC / WDR(120dB)
White Balance	Auto/Natural/Street Lamp/Outdoor/ Manual
Gain Control	Auto/Manual
Noise Reduction	3D DNR
Motion Detection	Off / On (4 Zone, Rectangle)
Region of Interest	Off / On (4 Zone)
Electronic Image Stabilization (EIS)	N/A
Smart IR	Support
Defog	N/A
Digital Zoom	16x
Flip	0°/90°/180°/270°
Mirror	Off / On
Privacy Masking	Off / On (4 Area, Rectangle)
Audio	
Compression	G.711a/ G.711Mu/ AAC/ G.726
Network	
Ethernet	RJ-45 (10/100Base-T)
Protocol	HTTP; HTTPS; TCP; ARP; RTSP; RTP; UDP; SMTP; FTP; DHCP; DNS; DDNS; PPPOE; IPv4/v6; QoS; UPnP;NTP; Bonjour; 802.1x; Multicast; ICMP; IGMP; SNMP
Interoperability	ONVIF, PSIA, CGI
Streaming Method	Unicast / Multicast
Max. User Access	10 Users /20 Users
Edge Storage	NAS Local PC for instant recording Mirco SD card 128GB
Web Viewer	IE, Chrome, Firefox, Safari
Management Software	Smart PSS, DSS, Easy4ip
Smart Phone	IOS, Android
Certifications	
Certifications	CE (EN 60950:2000) UL:UL60950-1 FCC: FCC Part 15 Subpart B

OS-I4-BEN8F-AELST-0280 | 8MP WDR IR Mini Bullet Network Camera

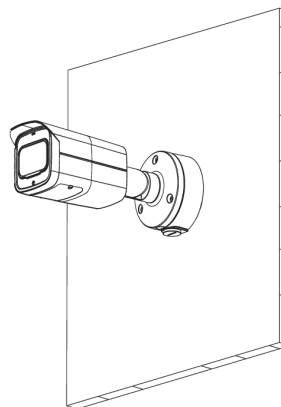
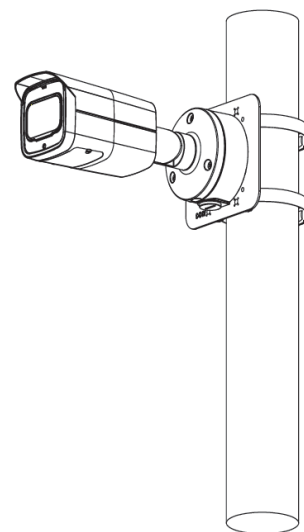
Technical Specifications

Interface	
Video Interface	N/A
Audio Interface	1/1 channel In/Out
RS485	N/A
Alarm	1 channel In: 5mA 5VDC 1 channel Out: 300mA 12VDC
Electrical	
Power Supply	DC12V, PoE(802.3af)(Class 0)
Power Consumption	<11W
Environmental	
Operating Conditions	-30° C ~ +60° C (-22° F ~ +140° F) / Less than 95% RH
Storage Conditions	-30° C ~ +60° C (-22° F ~ +140° F) / Less than 95% RH
Ingress Protection	IP67
Vandal Resistance	N/A
Construction	
Casing	Metal
Dimensions	244.1mm×79.0mm×75.9mm
Net Weight	0.815kg (1.80lb)
Gross Weight	1.08kg (2.38lb)

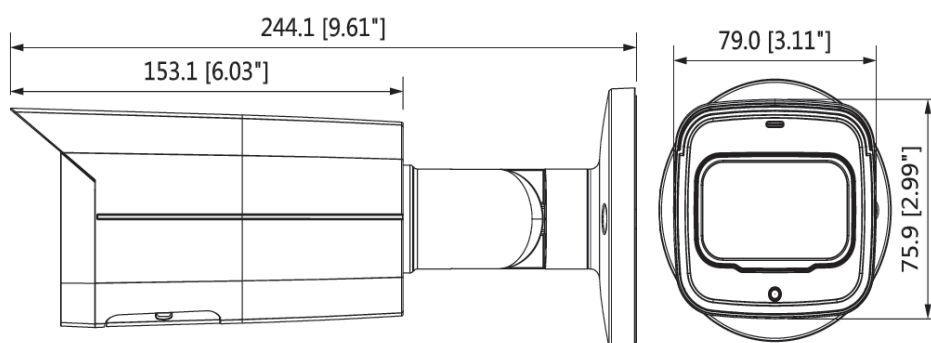
Accessories

**Junction Mount:
OSPFA135**

**Pole Mount:
OSPFA152-E**

**Junction Mount:
OSPFA135**

**Pole Mount:
OSPFB135 + OSPFA152-E**


Dimensions (mm/inch)



* The information contained in this document (photos, drawings, dimensions, specifications) may be subject to change without prior notice.

** Copyright© Osiris Security. All rights reserved. The information in this document can not be published, rewritten or republished in any form. If you wish to use the text or images in this document for commercial reasons, please contact marketing@osiris-security.com